


Tipo	Correia		d	D1	L	A1	L1	e	n	Peso [kg]	Referência do Rolo	Cmax [kg]	n0 [RPM]				
	Pol	mm															
Duplo	20	508	20	100	280	288	306	14	9	3,6	BCM RI 20" Ø20 Ø100	171,7	191				
Triplô	24	610	20	100	230	238	256	14	9	3,0	BCM RI 24" Ø20 Ø100	219,2	191				
				127						4,4	BCM RI 24" Ø20 Ø127	197,7	150				
Triplô	30	762	20	100	280	288	306	14	9	3,6	BCM RI 30" Ø20 Ø100	171,7	191				
				127						5,2	BCM RI 30" Ø20 Ø127	152,4	150				
Triplô	32	813	20	100	300	308	326	14	9	3,9	BCM RI 32" Ø20 Ø100	157,7	191				
				127						5,6	BCM RI 32" Ø20 Ø127	139,2	150				
Triplô	36	914	20	100	340	348	366	14	9	4,3	BCM RI 36" Ø20 Ø100	135,4	191				
				127						6,3	BCM RI 36" Ø20 Ø127	118,4	150				
Triplô	42	1067	20	100	380	388	406	14	9	4,8	BCM RI 42" Ø20 Ø100	118,4	191				
				127						6,8	BCM RI 42" Ø20 Ø127	102,6	150				
			25	127			412	18	12	7,7	BCM RI 42" Ø25 Ø127	213,2	150				
				152						9,9	BCM RI 42" Ø25 Ø152	222,4	126				
				165						11,1	BCM RI 42" Ø25 Ø165	221,2	116				
Triplô	48	1219	20	100	440	448	466	14	9	5,5	BCM RI 48" Ø20 Ø100	99,0	191				
				127						7,8	BCM RI 48" Ø20 Ø127	84,6	150				
			25	127			472	18	12	8,8	BCM RI 48" Ø25 Ø127	186,6	150				
				152						11,4	BCM RI 48" Ø25 Ø152	184,0	126				
				165						12,8	BCM RI 48" Ø25 Ø165	182,6	116				
				152						12,2	BCM RI 48" Ø30 Ø152	270,8	126				
				30						165	472	22	12	13,6	BCM RI 48" Ø30 Ø165	269,3	116
										165							
Triplô	54	1372	20	100	490	498	516	14	9	6,1	BCM RI 54" Ø20 Ø100	86,7	191				
				127						8,6	BCM RI 54" Ø20 Ø127	73,2	150				
				152						11,6	BCM RI 54" Ø20 Ø152	76,7	126				
			25	127			522	18	12	9,7	BCM RI 54" Ø25 Ø127	162,8	150				
				152						12,5	BCM RI 54" Ø25 Ø152	160,0	126				
				165						14,1	BCM RI 54" Ø25 Ø165	158,4	116				
				152						14,0	BCM RI 54" Ø30 Ø152	230,7	126				
				30						165	522	22	12	15,6	BCM RI 54" Ø30 Ø165	229,1	116
										165							
				Triplô						60	1524	20	100	540	548	566	14
127	9,4	BCM RI 60" Ø20 Ø127	64,0		150												
152	12,7	BCM RI 60" Ø20 Ø152	66,7		126												
25	127	572	18		12	10,5	BCM RI 60" Ø25 Ø127	143,9	150								
	152					13,7	BCM RI 60" Ø25 Ø152	140,7	126								
	165					15,4	BCM RI 60" Ø25 Ø165	139,0	116								
	152					15,3	BCM RI 60" Ø30 Ø152	200,3	126								
	30					165	572	22	12			17,0	BCM RI 60" Ø30 Ø165			198,6	116
						165											
	Triplô					72	1829	20	100			640	648			666	14
127		11,0	BCM RI 72" Ø20 Ø127	49,9	150												
152		14,8	BCM RI 72" Ø20 Ø152	51,1	126												
25		127	672	18	12			12,3	BCM RI 72" Ø25 Ø127	115,4	150						
		152						16,0	BCM RI 72" Ø25 Ø152	111,7	126						
		165						18,0	BCM RI 72" Ø25 Ø165	109,6	116						
		152						17,7	BCM RI 72" Ø30 Ø152	156,4	126						
		30						165	672	22	12			19,8	BCM RI 72" Ø30 Ø165	154,3	116
								165									

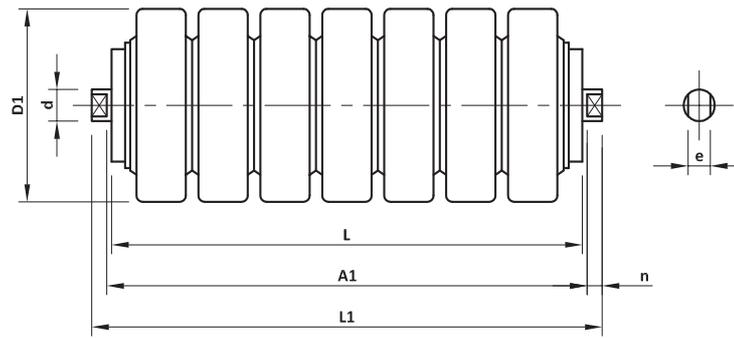

Tipo	Correia		d	D1	L	A1	L1	e	n	Peso [kg]	Referência do Rolo	Cmax [kg]	n0 [RPM]
	Pol	mm											
Tripla	80	2032	25	127	750	758	782	18	12	14,2	BCM RI 80" Ø25 Ø127	93,0	150
				152						18,5	BCM RI 80" Ø25 Ø152	88,7	126
				165						20,9	BCM RI 80" Ø25 Ø165	86,3	116
			30	152				22	12	20,5	BCM RI 80" Ø30 Ø152	123,3	126
				165						22,9	BCM RI 80" Ø30 Ø165	120,8	116
Tripla	84	2134	25	127	780	788	812	18	12	14,6	BCM RI 84" Ø25 Ø127	88,1	150
				152						19,1	BCM RI 84" Ø25 Ø152	83,6	126
				165						21,6	BCM RI 84" Ø25 Ø165	81,1	116
			30	152				22	12	21,1	BCM RI 84" Ø30 Ø152	116,1	126
				165						23,6	BCM RI 84" Ø30 Ø165	113,6	116