




Correia		d	D1	L	A1	L1	e	n	f	x0	Disposição das Borrachas	Peso [kg]	Referência do Rolo	Cmax [kg]	n0 [RPM]
Pol	mm														
20	508	20	100	560	568	594	14	9	4	25	3-1-3	5,7	BCM RRA 20" Ø20 Ø100	74,5000	191
24	610	20	100	700	708	734	14	9	4	25	3-1-3	6,6	BCM RRA 24" Ø20 Ø100	56,6000	191
			127									9,2	BCM RRA 24" Ø20 Ø127	46,1000	150
30	762	20	100	840	848	874	14	9	4	25	3-1-1-3	7,7	BCM RRA 30" Ø20 Ø100	44,3000	191
			127									10,7	BCM RRA 30" Ø20 Ø127	34,8000	150
32	813	20	100	900	908	934	14	9	4	25	3-1-1-1-3	8,4	BCM RRA 32" Ø20 Ø100	40,0000	191
			127									11,6	BCM RRA 32" Ø20 Ø127	30,7000	150
36	914	20	100	1020	1028	1054	14	9	4	25	4-1-1-1-4	9,7	BCM RRA 36" Ø20 Ø100	32,8000	191
			127									13,3	BCM RRA 36" Ø20 Ø127	23,7000	150
42	1067	20	100	1140	1148	1174	14	9	4	25	5-1-1-1-5	11,0	BCM RRA 42" Ø20 Ø100	26,8000	191
			127									15,1	BCM RRA 42" Ø20 Ø127	17,8000	150
		25	127			1184	18	12	6			17,0	BCM RRA 42" Ø25 Ø127	47,1000	150
			152									22,6	BCM RRA 42" Ø25 Ø152	45,8000	126
			165									24,7	BCM RRA 42" Ø25 Ø165	43,7000	116
48	1219	20	100	1320	1328	1354	14	9	4	50	5-1-2-1-5	12,3	BCM RRA 48" Ø20 Ø100	20,1000	191
			127									16,9	BCM RRA 48" Ø20 Ø127	11,3000	150
		25	127			1364	18	12	6			19,1	BCM RRA 48" Ø25 Ø127	35,8000	150
			152									25,4	BCM RRA 48" Ø25 Ø152	33,2000	126
			165									27,7	BCM RRA 48" Ø25 Ø165	30,9000	116
		30	152			1364	22	12	6			28,3	BCM RRA 48" Ø30 Ø152	47,1000	126
			165									30,6	BCM RRA 48" Ø30 Ø165	44,8000	116
54	1372	25	127	1470	1478	1514	18	12	6	50	5-1-1-3-1-1-5	21,7	BCM RRA 54" Ø25 Ø127	27,3000	150
			152									28,8	BCM RRA 54" Ø25 Ø152	23,5000	126
			165									31,6	BCM RRA 54" Ø25 Ø165	20,8000	116
		30	152				22	12	6			32,0	BCM RRA 54" Ø30 Ø152	35,0000	126
			165									34,8	BCM RRA 54" Ø30 Ø165	32,3000	116
60	1524	25	127	1630	1638	1674	18	12	6	50	6-1-1-3-1-1-6	24,0	BCM RRA 60" Ø25 Ø127	20,0000	150
			152									31,9	BCM RRA 60" Ø25 Ø152	15,1000	126
			165									35,0	BCM RRA 60" Ø25 Ø165	12,0000	116
		30	152				22	12	6			35,4	BCM RRA 60" Ø30 Ø152	24,6000	126
			165									38,5	BCM RRA 60" Ø30 Ø165	21,5000	116

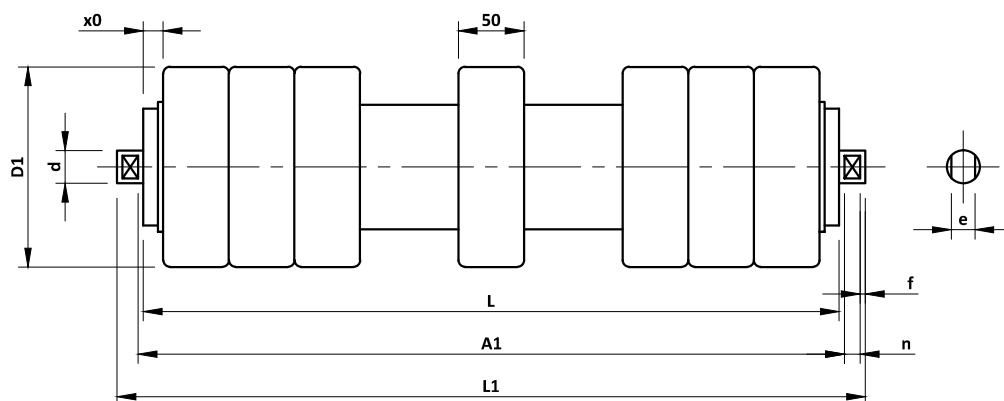